




Silicon Steel OA Cores

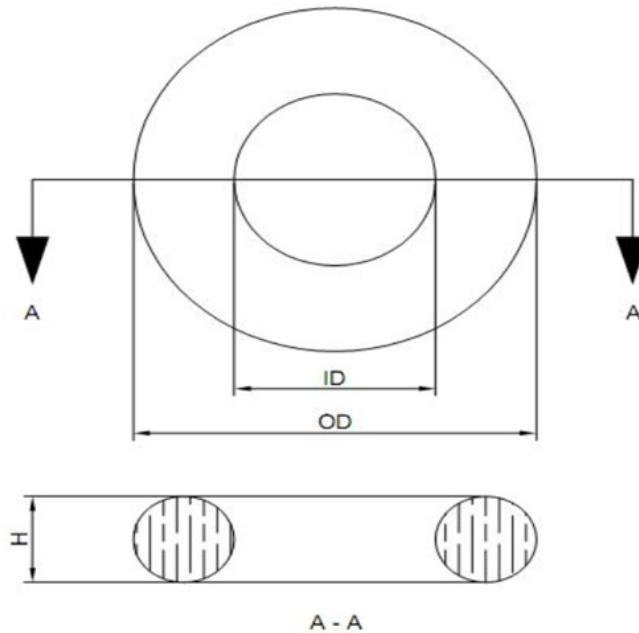

Core Specification

Part Number	VA Range @50Hz	ID (mm)	OD (mm)	Cross Section Diameter H (mm)	Weight (kg)
OA-10	10	32	64	16.51	0.26
OA-20	20	35	72	18.54	0.37
OA-30	30	38	75	20.07	0.42
OA-40	40	40	80	21.59	0.51
OA-50	50	42	86	23.62	0.65
OA-80	80	45	92	24.89	0.79
OA-100	100	48	98	26.42	0.95
OA-120	120	50	105	27.43	1.15
OA-150	150	52	108	28.96	1.27
OA-200	200	55	115	31.50	1.57
OA-250	250	58	122	33.53	1.84
OA-300	300	58	128	35.05	2.03
OA-400	400	62	134	37.59	2.53
OA-500	500	65	141	39.62	2.91
OA-600	600	68	148	41.40	3.36
OA-800	800	72	157	43.94	3.99
OA-1000	1000	75	166	46.99	4.84

OA cores can be supplied epoxy coated, cut or uncut.

